

# Bi2 SLI naked

**Recessed** fan coil unit.



## FEATURES

Cools, Dehumidifies, Heats and Filters

Recessed version

Compact: recessed wall thickness of just 142 mm


Range consists of 5 power models

Recess with formwork

AC Motor


Ultra slim aesthetic

installation:




Available in colors: ☐ White


MODEL	CODE	Bi2 without heating panel. (SLI)				
		SLI200	SLI400	SLI600	SLI800	SLI1000
Recessed		00624	00625	00626	00627	00628

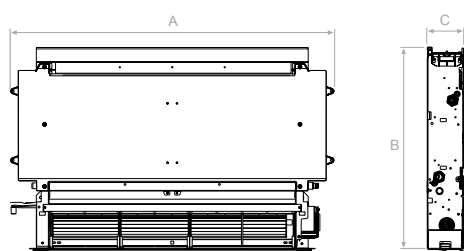

SLI 2 tubes Recessed VERSION		SLI 200	SLI 400	SLI 600	SLI 800	SLI 1000
<b>A</b>	mm	525	725	925	1125	1325
<b>B</b>	mm	576	576	576	576	576
<b>C</b>	mm	126	126	126	126	126
<b>Weight</b>	kg	7	9,5	11	14	17

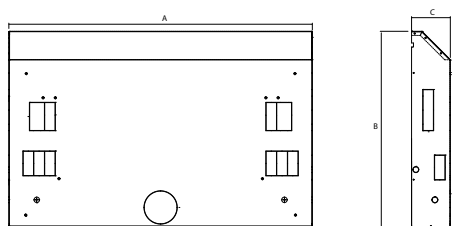

		200	400	600	800	1000
<b>A</b>	mm	713	913	1113	1313	1513
<b>B</b>	mm	725	725	725	725	725
<b>C</b>	mm	142	142	142	142	142

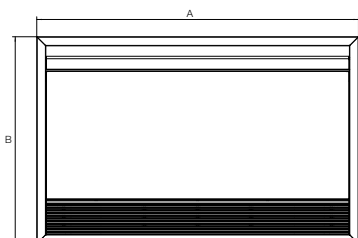

		200	400	600	800	1000
<b>A</b>	mm	772,5	972,5	1172,5	1372,5	1572,5
<b>B</b>	mm	754	754	754	754	754



Wall installation.



Recessed with aesthetic panel sheet (SLI version and SLIR heating)



Ceiling installation.

MODEL		B12 SLI				
		200	400	600	800	1000
(a) Total cooling capacity	kW	0,81	1,73	2,53	3,27	3,77
Sensible cooling capacity	kW	0,63	1,24	1,96	2,52	2,97
Water flow rate	lt/h	142	302	446	573	655
Water pressure loss	kPa	13,1	8,2	19	18,7	18,2
(b) Heating capacity (50°C)	kW	1,05	2,31	3,12	4,10	4,67
Water flow rate (50°C)	lt/h	84	185	249	329	374
Water pressure loss (50°C)	kPa	12,2	6,8	15,8	15,5	15,1
(c) Heating capacity (70°C)	kW	1,77	3,88	5,21	6,88	7,83
Water flow rate (70°C)	lt/h	152	334	448	592	673
Water pressure loss (70°C)	kPa	10,9	7,0	14,3	12,7	12,5
Water battery capacity	l	0,47	0,8	1,13	1,46	1,8
Maximum operating pressure	bar	10	10	10	10	10
Water connections	inches	Eurocone 3/4	Eurocone 3/4	Eurocone 3/4	Eurocone 3/4	Eurocone 3/4
(d) Air flow min	m³/h	100	170	180	370	420
(d) Air flow max	m³/h	160	320	460	575	650
Absorbed power min	W	6	9	9	17	19
Absorbed power max	W	17	28	35	38	43
Sound power min Lw	dB(A)	38	39	41	42	42
Sound power max Lw	dB(A)	52	53	53	54	54
(g) Sound power	dB(A)	34	36	37	35	38
Electrical supply	V/ph/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50

(a) Water temperature in battery inlet 7°C, water temperature in battery outlet 12°C, ambient air temperature 27°C b.s. and 19°C b.u.

(b) Water temperature in battery inlet 50°C, water flow in cooling, inlet ambient air temperature 20°C

















(c) Water temperature in battery inlet 70°C, water temperature in battery outlet 60°C, ambient air temperature inlet 20°C

(d) Air flow measured with clean filters

(g) Sound pressure measured at 1,5 m

# ACCESSORIES

	CODE	DESCRIPTION	COMPATIBILITY
REMOTE CONTROL	 <b>B0372</b>	Electronic control kit <b>for remotization</b> . The main operating parameters, set point and ambient temperature are transmitted from the remote control B0373 or B0736 to all connected fan coils on the network, enabling a seamless operation. It has a 230VAC outlet for the control of a solenoid valve, two clean contacts for the control of a chiller or a boiler, and a presence inlet.  Operation in MODBUSprotocol, RS485.	B0736   My Home by 
	 <b>B0707</b>	Electronic control kit <b>for remotization</b> for 3-speed fan (selectable between 5 available) and 2 solenoid valves. Fan control kit with motor feedback with speed gauge generator. No need to configure controls depending on the size of the fan coil. Electronic remote board solenoid valves actuating contacts. From same control B0151 or B0152 you can control up to 10 terminals equipped with Bi2 B0707.	B0151 B0152
	 <b>B0151</b>	<b>Wall control kit</b> with thermostat, summer/winter selector and speed switch. Wall thermostat with room sensor, On-Off switch, three-speed fan and summer/winter selector. Temperature range setting from 5 °C to 30 °C. 230 V supply. It has two 230VAC hot water and cold water solenoid outlets and an inlet water temperature sensor.	B0707
	 <b>B0152</b>	<b>Recessed control kit</b> LCD with ambient sensor and thermostat, summer/winter selector and speed switch. Electronic recessed thermostat with ambient sensor, On-Off switch, fan speed selector (min, med, max and auto), ambient temperature, minimum water sensor mode and summer/winter selector. Temperature range setting from 5 °C to 30 °C. 230 V supply.	B0707
	 <b>B0736</b>	LCD <b>wall clock thermostat remote</b> control kit Programmable wall LCD thermostat control for MODBUS connection, RS485. Ability to control up to 30 units. Desired temperature selection, operation mode, fan speed, manual/programmable thermostat. Room sensor inserted in control. Backlit LCD. Presence contact input. The control is equipped with a 230/12VAC double insulation power transformer and a buffer battery. Wall installation with center to center distance compatible with standard recessed mounting box 503.	B0372 

		CODE	DESCRIPTION
HYDRAULIC KITS		B0139	<b>2 way group valves with thermoelectric actuator kit.</b> Consists of a valve with thermoelectric actuator and holder, the first allows for the control of terminal thermal emissions intercepting water passage; the holder allows the balancing of system load losses. This kit is mandatory in version SLR except in the case of using a 3-way valve kit or in the presence of a collector with thermoelectric heads.
		B0641	<b>2-way valves group kit with thermoelectric actuator and bypass branch with pressure relief valve.</b> The kit consists of a valve with thermoelectric actuator, a holder and a bypass with a pressure relief valve, the first allows the control of terminal thermal emissions intercepting water passage; the holder allows the balancing of system load losses while the by-pass maintains the system balanced even with cabinet excluded. This kit is an alternative to the 2-way solenoid valve kit. (Required in SLR version)
		B0635	<b>3-way group valves kit with thermoelectric actuator.</b> Consists of a three-way diverter valve with thermoelectric actuator, and a holder. The first allows the control of terminal thermal emissions intercepting water passage; the holder allows the balancing of system load losses; the by-pass keeps water circulating in the system. This kit is an alternative to the 2-way solenoid valve kit (required in version SLR).
		B0205	<b>Manual 2-way group valves kit.</b> Consisting of a valve and a holder, the first allows the cabinet to be manually excluded from the system, while the holder allows the balancing of system load losses. Also allowed when solenoid valves on the collector are managed by the control kit of terminal Bi2.
		B0204	<b>Manual 2-way valve isolation kit.</b> Avoids condensation during the cooling operation (already included in the other thermoelectric hydraulic kits).
		B0501	<b>Spacer kit (No. 1 unit) 3/4 Eurokonus.</b> Available for multilayer pipes d. 20 mm. (which do not allow adequate bending radii), no. 1 or 2 kit. for machine according to the type of installation.
		B0200 B0201	<b>Adaptors couple kit.</b> Allows you to transform the Bi2 3/4 " Eurocone connection into a standard 1/2 "(B0200) or 3/4 " (B0201) gas thread connection.
		B0203	<b>kit 90° Eurokonus bend.</b> Facilitates the connection in case of hydraulic connections with walled pipes
ELECTRICAL KITS		B0459	<b>Control connection extension kit.</b> Power and motor sensor electric connection cable for installations where connection positions are rotated (from Left to Right) .
RECESSED KIT			<b>Ceiling recessed kit: air discharge grid with wing profile.*</b> B0550 (200), B0551 (400), B0552 (600), B0553 (800), B0554 (1000) <b>Ceiling recessed kit: air suction grid with wing profile.*</b> B0559 (200), B0560 (400), B0561 (600), B0562 (800), B0563 (1000)
			<b>Ceiling recessed kit: air discharge grid with wing profile.</b> B0815 (200), B0816 (400), B0817 (600), B0818 (800), B0819 (1000) <b>Ceiling recessed kit: air suction grid with wing profile.</b> B0820 (200), B0821 (400), B0822 (600), B0823 (800), B0824 (1000)
			<b>Suction kit for false ceiling or plasterboard trapdoor.</b> Channels the air drawn from the suction grille to the cabinet. B0194 (200), B0195 (400), B0196 (600), B0197 (800), B0198 (1000)
			<b>Upper telescopic discharge plenum kit.</b> Channels the air from the cabinet to the discharge grille. B0160 (200), B0161 (400), B0162 (600), B0163 (800), B0164 (1000)
			<b>Formwork for recess with closing panel: Structure for recessed installation. *</b> For vertical installation (combine with closing panel) B0568 (200), B0569 (400), B0570 (600), B0571 (800), B0572 (1000)
			<b>Closing panel for recessed structure.</b> For vertical installation (combine with recessed structure kit) B0578 (200), B0579 (400), B0580 (600), B0581 (800), B0582 (1000)
			<b>90° insulated discharge plenum kit.</b> Channels the air from the cabinet to the discharge grille. (non compatible with recessed structure). B0165 (200), B0166 (400), B0167 (600), B0168 (800), B0169 (1000)

\* ceiling recessed kit while stocks last; hereafter ceiling recessed kits with codes B0815-B0819 and B0820-B0824 will be valid.